



# VAN BEELEN

NETTING - ROPES - TWINES

## DYNEEMA® D-ROPE 12 strand plaited




### SK75

spec. gravity: 0.97  
melting point: 150 °C  
max. elongation: 4 %

(up to 8 mm: 16 strand plaited)

diam [mm]	circumf. [inch]	weight [kg/100m]	breaking strength [t]
4	0.50	0.9	1.4
5	0.63	1.5	2.2
6	0.75	2.0	3.2
7	0.88	2.7	4.6
8	1.00	3.6	5.8
9	1.13	4.7	7.3
10	1.25	5.7	9
12	1.50	8	13
14	1.75	11	17
16	2.00	14	22
18	2.25	18	28
20	2.50	22	34
22	2.75	26	42
24	3.00	31	48
26	3.25	36	58
28	3.50	42	68
30	3.75	48	78
32	4.00	55	89
34	4.25	62	100
36	4.50	69	111
38	4.75	77	123
40	5.00	86	136
42	5.25	94	148
44	5.50	104	168
46	5.75	113	182
48	6.00	123	195
50	6.25	138	203
52	6.50	150	215

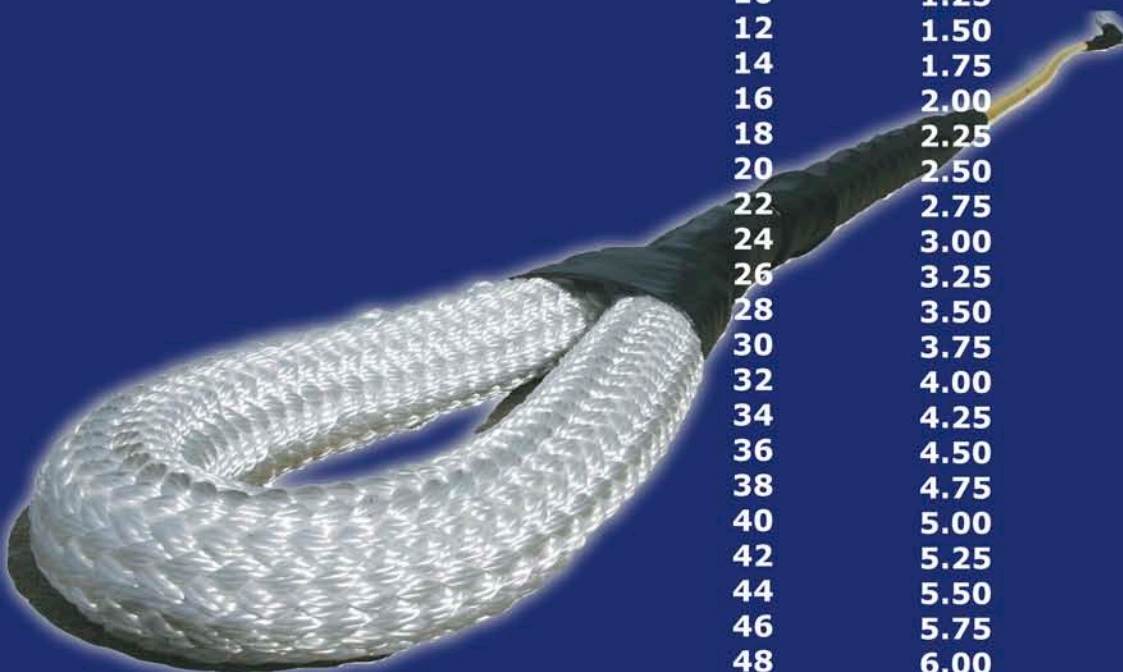

**van Beelen** Dyneema® D-Ropes are available in SK60 and SK75. Both types can be supplied with a strong protective jacket in Dyneema®, Polyester or Powerblue braid. This will ensure the D-Ropes always remain firm and have excellent abrasion resistance.